

LAURA ASHLEY


IL3874

BECKWORTH SINGLE PENDANT INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.

Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION


- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with IEE Wiring Regulations and the Building Regulations.
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is class 2 double insulated =  and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. Before removing the existing rose, carefully note the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
3. Remove mounting bracket from fitting by undoing retaining screws. Using the bracket as a template, mark and then drill the fixing holes in the ceiling. Ensure that the holes are drilled into a joist or other suitable mounting and not just the plaster
4. Fix the mounting bracket to ceiling using suitable fixings ①. **Take care not to damage wiring.**
5. Chain links may be adjusted to reduce the height of the fitting. Using two pairs of pliers carefully open the chain links and remove the required number of links. Close the links. Note: Cloth should be used between the jaws of the pliers to protect the decorative finish. Pull any excess cable through the ceiling cup;
IMPORTANT ensure the chain is supporting the weight of the fitting and not the electrical cable.
6. Weight of the fitting must be supported whilst you make the make electrical connections as follows②:
Connect the supply live (normally brown or red) to fitting live (marked “L”) on the terminal block.
Connect the supply neutral (normally blue or black) to fitting neutral (marked “N”) on the terminal block.
Ensure electrical connections are tight and no loose strands of wire are left out of the connector block.
This fitting is double insulated and no earth should be connected to any part of this fitting. If there are earth wires present please terminate these into a separate terminal block (not supplied) to ensure continuity for the house earth circuit is maintained. Wrap the earth terminal block in 2 layers of good quality insulation tape and make sure the terminal block is kept away from the fitting.
7. Attach the fitting to the mounting bracket using the retaining screws removed earlier③. Take care not to trap wires in the process.
8. **To fit the shade:** This step may be easier performed by tilting the metal pendant to one side whilst supporting it with one hand.
9. Pass one of the supplied clear silicone washers over the lamp holder section④
10. Pass the inner shade glass carefully over the lamp holder section until it touches the silicone washer⑤
11. Fit the second silicone washer over the lamp holder⑥
12. Fit the decorative metal disk washer over the lamp holder section⑦
13. Screw the metal threaded shade ring to the lamp holder section to secure the components in place ⑧ Take care not to overtighten as this may cause damage to the fitting. **Note:** The shade ring collar should be fitted so that the threads on the inside of the collar are facing the installer and not facing towards the fitting, **See image below for reference.** Ensure the assembly has been fully secured in place before leaving unattended.
14. Fit the bulb type and wattage as shown on fitting⑨. **The wattage indicated must not be exceeded.**
15. Switch on the electricity supply at the fuse board.

LAURA ASHLEY

IL3874

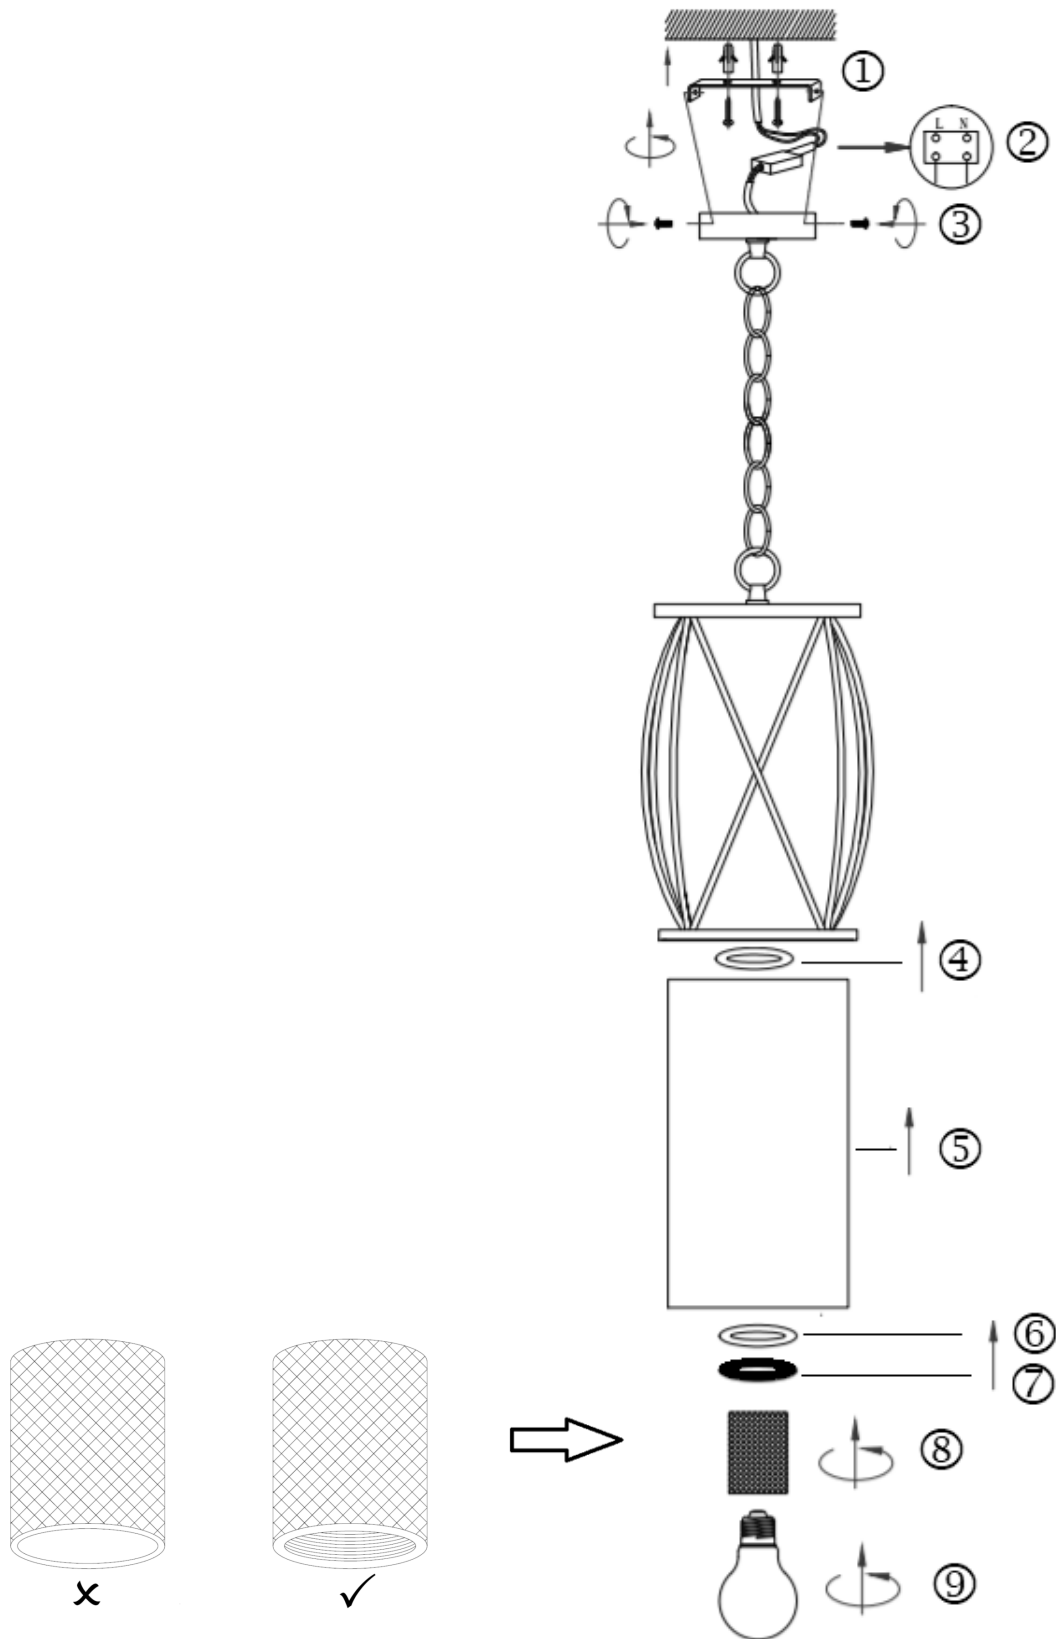

GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**