
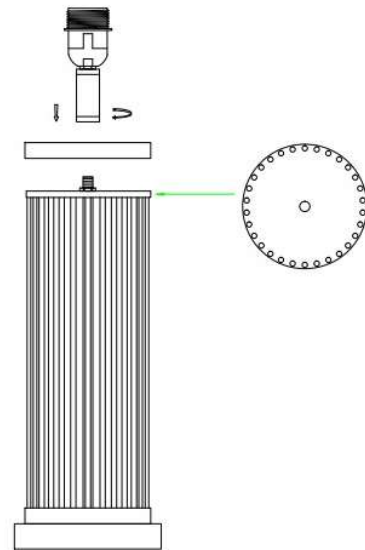


OLALLA GLASS ROD REPLACEMENT

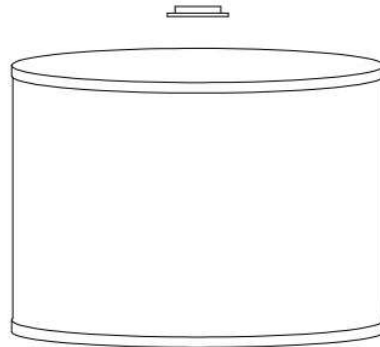

- a) Where required remove the shade.
- b) Remove lampholder, firmly hold table lamp at the plinth then rotate lampholder anticlockwise then lift away.
- c) Remove cover plate by lifting this away to reveal top of glass rods.
- d) Replace broken rods as required whilst taking care not to cause injury or scratch base plinth.
- e) Ensure glass rods are correctly seated then restore cover plate.
- f) Restore lampholder by withdrawing cable at the same time attach this onto centre threaded rod.
- g) Rotate lampholder clockwise to secure this back into position, ensure this is tight and take care not to over tighten.
- h) Fit the shade.