

LAURA ASHLEY

IL4883

HILCOTE 5LT PENDANT INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.

Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION

- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with current IEE Wiring Regulations and Building Regulations.
- * To prevent electrocution, switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is double insulated = therefore no earth is required and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. If you are fitting this product in place of an existing one, you may find that there are more than 3 sets of cables connected. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting. Before removing existing fitting, carefully note position of each set of cables
3. Rotate the stem into the lamp holder section by aligning the threads ① Hold the lamp holder section still and rotate the stem only until tight. Lock the stem in place by tightening the grub screw located on the side of the receiving collar with the hex key provided ② Note: the grub screw may need to be loosened initially to allow stem connection.
4. Remove the mounting bracket from the ceiling cup by removing the 2 screws located in the side

Chain links may be adjusted to reduce the height of the fitting. Using two pairs of pliers, carefully open the chain links and remove the required number to achieve the desired fitting height. Note: A cloth should be used between the jaws of the pliers to protect the decorative finish. Pull any excess cable through the ceiling cup. Attach the bottom adjustable chain link to the last link of the support chain and to the connection ring of the chandelier. The link is opened by twisting the barrel nut at the side anti-clockwise, hooking the chain link over the top ring of the chandelier and retightening to close the link ③


IMPORTANT ensure the chain is supporting the weight of the fitting and not the electrical cable.

5. Using the mounting bracket as a template ④ mark and drill fixing holes in the ceiling. Ensure the holes are drilled into a joist or other suitable mounting and not just into plaster.
6. Secure the mounting bracket to the surface using suitable fixings for the type of material ⑤
7. The weight of the fitting must be supported whilst making the electrical connections as follows ⑥:
 - Connect supply live (normally brown or red) to fitting live (marked “L”) on the terminal block.
 - Connect supply neutral (normally blue or black) to fitting neutral (marked “N”) on the terminal block.This fitting is double insulated and no earth should be connected to any part of this fitting. If there are earth wires present please terminate these into a separate terminal block (not supplied) to ensure continuity for the house earth circuit is maintained. Wrap the earth terminal block in 2 layers of good quality insulation tape and make sure the terminal block is kept away from the fitting.
8. Offer the fitting up to the mounting bracket and secure in place using the screws removed earlier. **Take care not to damage or trap any wiring.**
9. Remove the shade ring already attached to the lamp holders. Place the hole at the base of the glass rod support ⑦ over the lamp holder and refit the shade ring to secure the component in place ⑧ Take care not to over-tighten as this may cause damage to the fitting.
10. Fit the bulb: Type and wattage as indicated on the fitting ⑨ **The wattage indicated must not be exceeded.**
11. Fit the longer glass rods by gently lowering them into the holes on the inner part of the support as shown in the diagram ⑩ The rods will gently come to rest in the frame.

LAURA ASHLEY

IL4883

- Fit the shorter glass rods by gently lowering them into the holes on the outer part of the support as shown in the diagram. The rods will gently come to rest in the frame (11).
- Switch on the electricity supply at the fuse board. Your lamp is now ready for use.

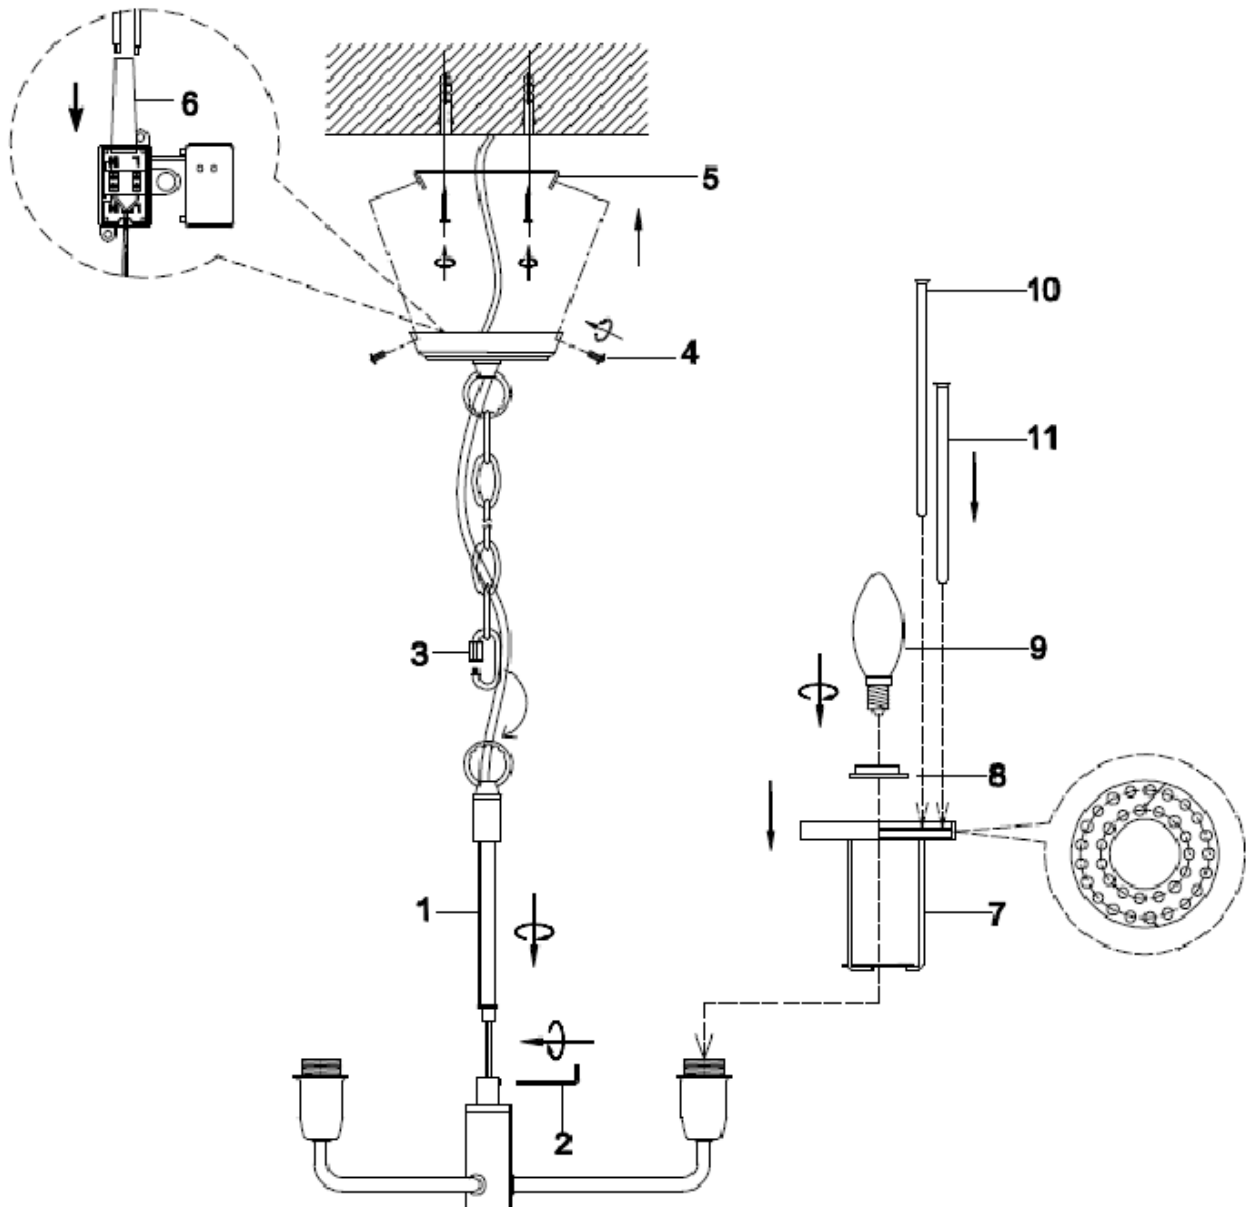

GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**