


NON-ELECTRIC SHADE REDUCER FITTING INSTRUCTIONS

No experience of electrical wiring is required to install this pendant.

Fitting and changing a light bulb.

Make sure the electricity is switched off at the fuse board before removing bulb.

1. Ensure the lamp holder is in good condition and is not damaged before proceeding.
2. Allow the old bulb to cool down before handling. Remove existing light bulb from lamp holder.
3. Loosen the screws from the metal shade gimbal. Position the gimbal over the glass ① and secure it using the screws. ② Ensure metal shade gimbal is correctly seated on the glass before fully tightening the screws. **Check to make sure the metal shade gimbal is correctly attached to the glass.**
4. If required, clip the reducing ring into the top ring of the shade. ③
5. **Remove the lower half of the lampholder and inspect it to ensure it is free from damage.**
6. Pass the upper half of the lampholder, attached to the cable, through the top ring of the shade. ④ Refit the lower half of the lampholder to secure the pendant in position. ⑤
7. Fit a lamp of the type and wattage specified on the product label.
8. Restore power at the fuse board. The light is now ready for use.

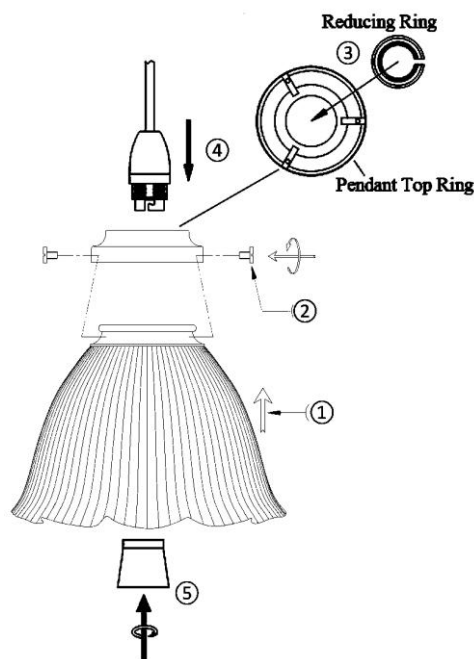

NON-ELECTRIC SHADE REDUCER FITTING INSTRUCTIONS

No experience of electrical wiring is required to install this pendant.

Fitting and changing a light bulb.

Make sure the electricity is switched off at the fuse board before removing bulb.

1. Ensure the lamp holder is in good condition and is not damaged before proceeding.
2. Allow the old bulb to cool down before handling. Remove existing light bulb from lamp holder.
3. Loosen the screws from the metal shade gimbal. Position the gimbal over the glass ① and secure it using the screws. ② Ensure metal shade gimbal is correctly seated on the glass before fully tightening the screws. **Check to make sure the metal shade gimbal is correctly attached to the glass.**
4. If required, clip the reducing ring into the top ring of the shade. ③
5. **Remove the lower half of the lampholder and inspect it to ensure it is free from damage.**
6. Pass the upper half of the lampholder, attached to the cable, through the top ring of the shade. ④ Refit the lower half of the lampholder to secure the pendant in position. ⑤
7. Fit a lamp of the type and wattage specified on the product label.
8. Restore power at the fuse board. The light is now ready for use.

