



G9 GLASS SHADE FLOOR LAMP


These instructions are provided for your safety.
Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION

- * The supply cable runs through the inside of this product. Take care not to place undue stress on the cable whilst unpacking to prevent the possibility of a poor connection.
- * If the external flexible cable of the lamp is damaged it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- * If you are in any doubt consult a person competent to give advice on the assembly of electrical equipment.
- * To prevent electrocution switch off at the mains supply before assembling or maintaining this fitting. Ensure the plug is not connected to any power supply and read instructions before assembly.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Do not exceed wattage stated.
- * This product is designed for use with self-shielded tungsten halogen lamps only. 
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of old bulbs carefully.

ASSEMBLY INSTRUCTIONS

1. Unpack the product and remove all packaging. Be careful not to scratch the surface of the product whilst removing the wrapping.
2. Lay the product out on the floor. If the floor is not carpeted please cover it with a soft cloth to avoid damage to the flooring and surface of the product. Assembly should take place with the product lying flat.
3. Where required, remove protective packaging (plastic / cardboard) located at cable entry points of the product.
4. Fit stem with lamp holders into lower stem, ensure threaded holes match holes in the lower stem. ① Use a screwdriver to tighten fixing screws to lock stems together, ensure stems butt together before fully tightening screws. ②
5. Fit assembled stem with lamp holders into lower base, ensure threaded holes match holes in the short stem attached to base. ③ Use a screwdriver to tighten fixing screws to lock stems together, ensure stems butt together before fully tightening screws. ④
6. Gently pull excess cable out of the base until stem meets the centre of the base. ⑤
7. Stand floor lamp upright and ensure all assembled stem fixings have been fully tightened.
8. With the product laid on a covered surface again, pull excess cable out of the base. Peel off the protective covering off base felt, attach this onto the underside of base whilst making sure this is placed central. ⑥
9. **Fit bulb**, type and wattage as indicated on floor lamp. ⑦ **The wattage indicated must not be exceeded.**  **Always use self-shielded bulbs.** Do not touch halogen bulbs with bare hands, as this will shorten their life
10. Screw the glass onto lampholder and **take care not to over tighten.** ⑧
11. Floor lamp is now ready for use.

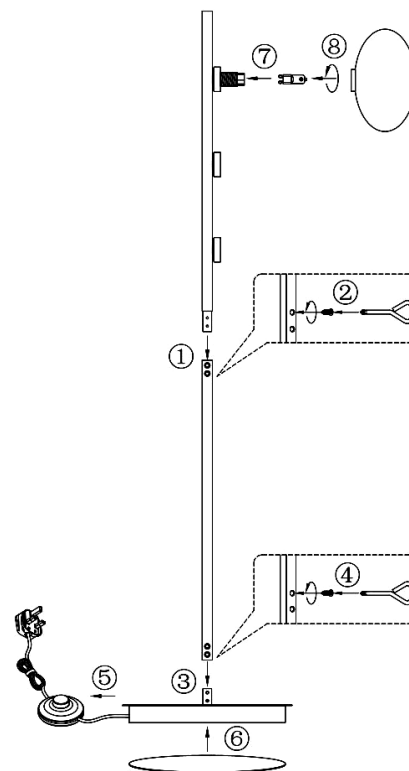

GENERAL INFORMATION

This floor lamp is designed for internal use only.
Do not use polish or an abrasive cleaner - just a soft dry cloth.

To register your product for an extended five-year warranty, please complete the simple form at

www.darlighting.co.uk/warranty

You'll need to fill in the details of the product, the retailer you purchased it from, and also the installer and the installation. Please also upload a clear copy of the original purchase invoice or receipt to complete this registration.

UK: där Lighting Ltd, Wildmere Road, Banbury, Oxon, OX16 3JZ

Ireland & EU: Dar Lighting Ireland Limited, Suite 108, Q House, 76 Furze Road, Sandysford Industrial Estate, Dublin 18