

SHADE SOLD
SEPARATELY

där
lighting

IL4797

GLASS COLUMN FLOOR LAMP

These instructions are provided for your safety.


Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION

- * If the flexible cable of this product is damaged it should be exclusively replaced by the manufacturer or a similar qualified person in order to avoid a hazard.
- * To prevent electrocution switch off at the mains supply before assembling or maintaining this fitting. Ensure the plug is not connected to any power supply and read instruction before assembly.
- * This fitting is fitted with a 3 Amp fuse and is suitable for 240 Volt ring mains.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, ensure product is unplugged and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

ASSEMBLY INSTRUCTIONS

1. Unpack the product and remove all packaging. Be careful not to scratch the surface of the product whilst removing the wrapping.
2. Lay the product out on the floor. If the floor is not carpeted please cover it with a soft cloth to avoid damage to the flooring and surface of the product. Assembly should take place with the product lying flat.
3. It may be necessary to remove protective packaging (plastic / cardboard) located at cable entry points of the product.
4. Screw the top stem onto the bulb holder section, taking care to hold the stems parallel to avoid cross threading. Hold the lamp head section still and only turn below stem so as not to twist the cable. ①
5. Screw the next stem onto the bulb holder assembly. Hold the bulb holder assembly still and rotate the lower stem to prevent the cable twisting. Take care to not cross thread the stem. ②
6. Screw the short stem onto the bulb holder assembly. Hold the bulb holder assembly still and rotate the short stem to prevent the cable twisting. Take care to not cross thread the stem. ③
7. Gently pull excess cable out of the base until the stem meets the centre of the base. ④
8. With the product laid on a covered surface, keep assembled stems parallel to avoid cross threading and rotate the base onto assembled stems. Keep stems stationary and only rotate the base. Stand the floor lamp upright and ensure all assembled stems have been fully tightened. ⑤
9. With the product laid on a covered surface again, pull excess cable out of the base. Peel off the protective covering off base felt, attach this onto the underside of base whilst making sure this is placed central. ⑥
10. **SHADE NOT INCLUDED** - Remove the shade ring from the lamp holder then attach the shade, secure this into position using the shade ring. Take care not to over tighten.
11. **Fit bulb:** type and wattage as indicated. **The wattage indicated must not be exceeded.**
12. Floor lamp is now ready for use.

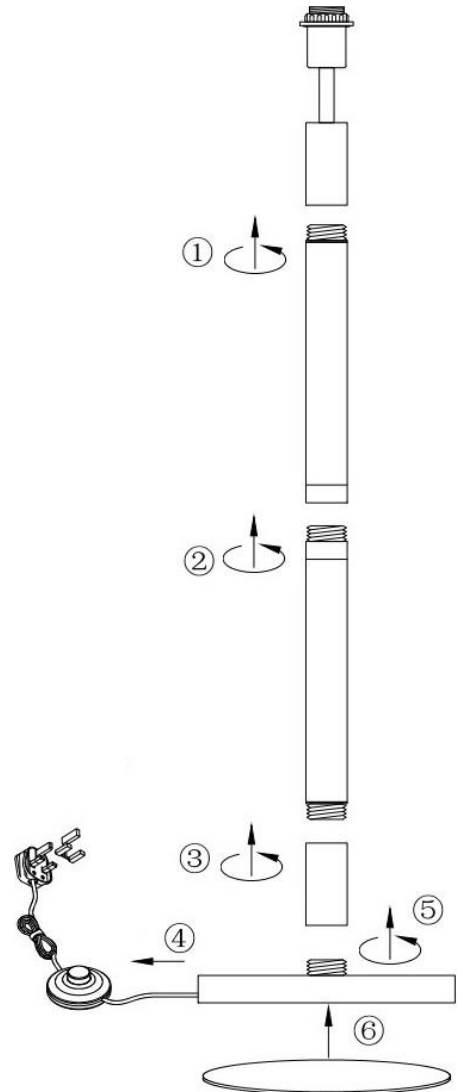

GENERAL INFORMATION

This floor lamp is designed for internal use only.

Do not use polish or an abrasive cleaner - just a soft dry cloth.

To register your product for an extended five-year warranty, please complete the simple form at

www.darlighting.co.uk/warranty

You'll need to fill in the details of the product, the retailer you purchased it from, and also the installer and the installation. Please also upload a clear copy of the original purchase invoice or receipt to complete this registration.

UK: *där Lighting Ltd, Wildmere Road, Banbury, Oxon, OX16 3JZ*

Ireland & EU: *Dar Lighting Ireland Limited, Suite 108, Q House, 76 Furze Road, Sandyford Industrial Estate, Dublin 18*